

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
29 December 2004 (29.12.2004)

PCT

(10) International Publication Number  
**WO 2004/113645 A1**

(51) International Patent Classification<sup>7</sup>: **E04G 11/08**

(21) International Application Number:  
PCT/AU2003/000780

(22) International Filing Date: 23 June 2003 (23.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant and

(72) Inventor: **BILOWOL, Peter** [AU/AU]; PO Box 546,  
NERANG, Queensland 4211 (AU).

(74) Agent: **BILOWOL, Peter**; PO Box 546, Nerang, QLD  
4211 (AU).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG,  
US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: FORMWORK SYSTEMS

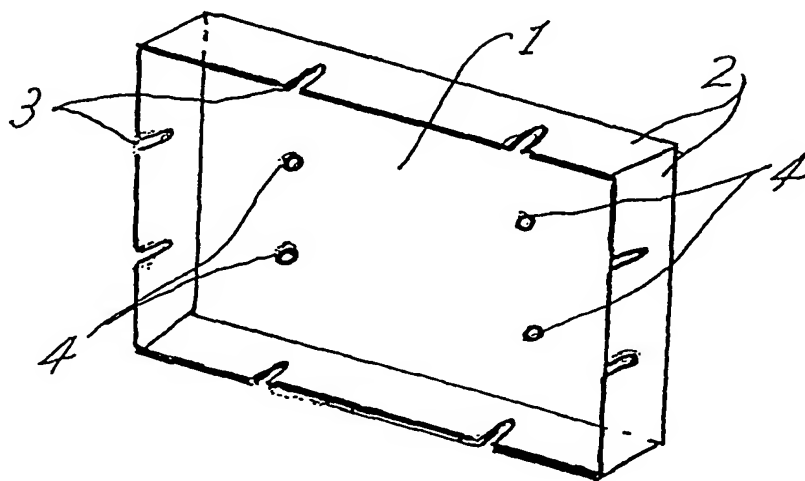

(57) Abstract: The invention relates to a method of construction of concrete beams or walls using a formwork module comprising an elongate rectilinear front face (1), a peripheral border wall (2) extending from the front face, two spaced pairs of bolt sockets (4) extending through the rectilinear front face (1), and a plurality of opposed slots (3) in the peripheral border wall (2).

WO 2004/113645 A1